



TT-568 INSTRUCTIONS

12/87

Full Power Panel

Kit No. PAA-239323


Installation of the full power panel provides full power at 120 volts through one 30 amp receptacle, or 120/240 volts through two 15 ampere receptacles. These panels can be installed on 60 hertz models only.

To Install


- Remove the four receptacle panel mounting screws.
 Save hardware.
- Pull out receptacle panel and disconnect stator leads 1, 2, and 4.
- 3. Remove green wire from center boss in end bracket.
- On 120/240 volt sets remove the white neutral wire from boss in upper left hand corner of end bracket. Save hardware.


- 5. Connect stator leads 1, 2, and 4 to new panel.
- Connect white wire from 30 amp receptacle and stator lead number 3 to boss in upper left-hand corner of end bracket. Use retained hardware.
- 7. Connect green wire from 30 amp receptacle to center boss in end bracket with retained hardware.
- Position new panel, making sure leads are clear of the rotor.
- 9. Mount panel to end bracket with original hardware.

Parts List

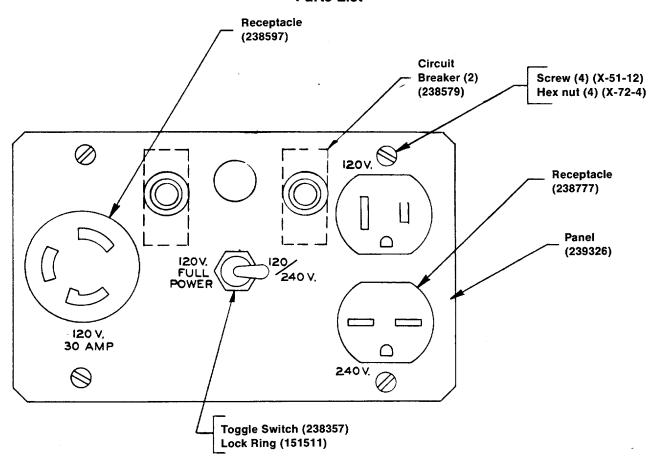

Backside of Panel

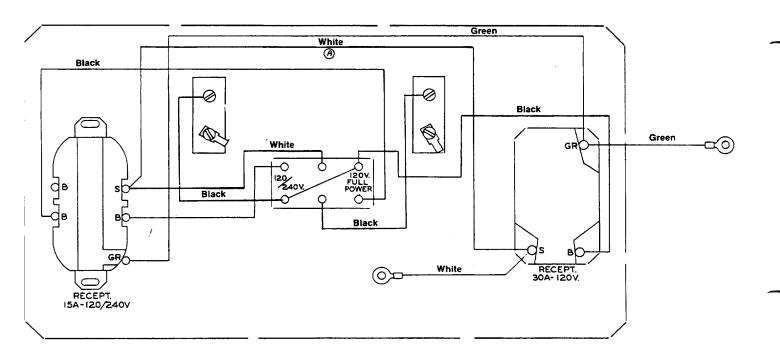

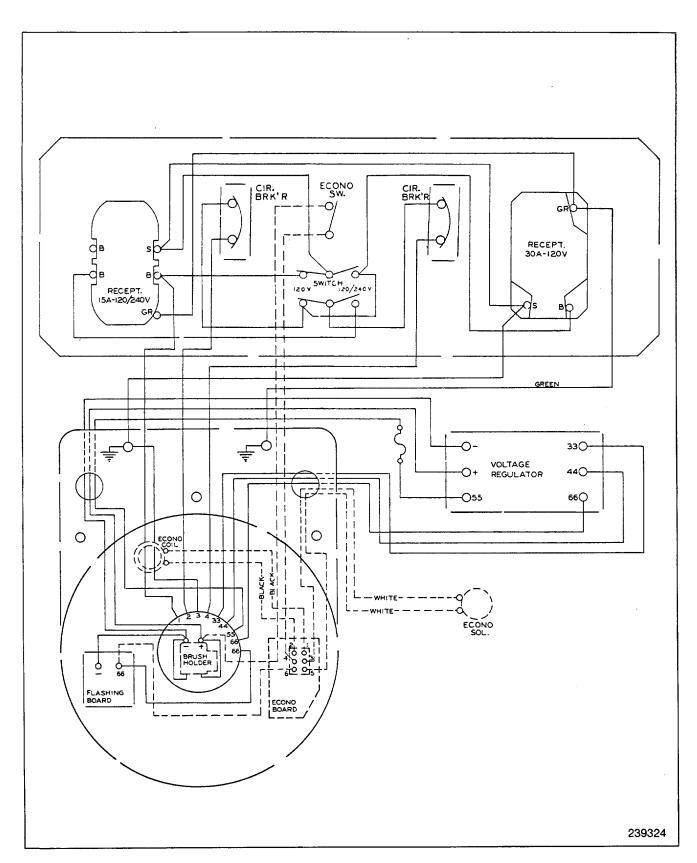

Wiring Diagram