THIS EDGE INTENTIONALLY LEFT BLANK FOR BINDING - PAPER SIZE 34" X 22" - THIS EDGE INTENTIONALLY LEFT BLANK FOR BINDING - PAPER SIZE 34" X 22" - THIS EDGE INTENTIONALLY LEFT BLANK FOR BINDING - PAPER SIZE 34" X 22" - THIS EDGE INTENTIONALLY LEFT BLANK FOR BINDING

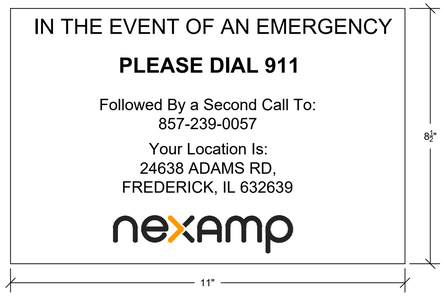

1. WHITE LABEL WITH BLACK LETTERING AND NEXAMP LOGO
2. INSTALL ON SITE ENTRANCE AND AT EQUIPMENT PADS IN A CONSPICUOUS PLACE.

11 OWNER EMERGENCY CONTACT LABEL
SCALE: NTS

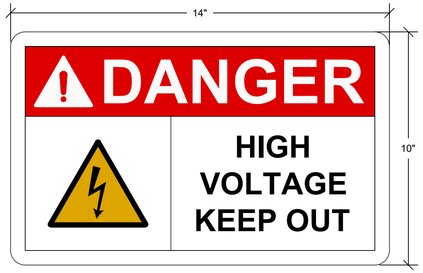

INSTALL AT ALL FENCE GATES AND AT INTERVALS OF 250 FT ALONG FENCE, NEXT TO NO TRESPASSING SIGNS.

INSTALL AT ALL FENCE GATES AND AT INTERVALS OF 250 FT ALONG FENCE, NEXT TO HIGH VOLTAGE SIGNS.

12 FENCE SIGNS
SCALE: NTS



1. YELLOW LABEL WITH BLACK LETTERING
2. INSTALL ON THE EAST AND WEST END OF ROW
3. LABELS IDENTIFIED WITH UNIQUE NUMBERS: ROW 01 TO ROW 62

13 ROW LABEL
SCALE: NTS

PV SIGNAGE REFERENCE AND SCHEDULE

		SIGNAGE QUANTITY PER DETAIL NUMBER												
EQUIPMENT DESCRIPTION	**EQUIPMENT ID**	1	2	3	4	5	6	7	8	9	10	11	12	13
UTILITY METER	UTILITY METER										1			
MAIN UTILITY DISCONNECT	GANG OPERATED DISCONNECT SWITCH	1	1	1			1	1		1				
RECLOSER CONTROLLER	SEL-651R		1											
CUSTOMER METER ENCLOSURE	CUSTOMER METER ENCLOSURE		1											
JUNCTION BOX	JUNCTION BOX		1											
AUX DISCONNECT	CPT-DS		1											
TRANSFORMER	XFMR-#*		2	2	2	2	2	2						
PV SWITCHBOARD	SWBD-#*		2	2	2		2	2						
INVERTER	INV-#.## *		20	20	20	20	20	20	20					
DC STRING COMBINER	CB-#.## *		20	20	20	20	20		20					
AUXILIARY MAIN CIRCUIT BREAKER	MCB-AUX		1		1									
AUXILIARY TRANSFORMER	XFMR-AUX		1											
AUXILIARY PANELBOARD	PNL-AUX		1											
DAS ENCLOSURE	DAS-1 ENCLOSURE		1											
WEATHER STATION	WS		1											
FENCE													19	
ACCESS GATE		5										5	5	
ROW NUMBER LABELS														124
EQUIPMENT PAD												1		
TOTAL QTY OF EACH PLACARD		6	54	45	45	42	45	25	40	1	1	6	24	124

* ID NUMBERS VARY. REPLACE # WITH ID NUMBERS.
UNDERLINED QUANTITIES ARE ESTIMATES. PROVIDE QUANTITY REQUIRED BASED ON FINAL INSTALLATION

14 SIGNAGE SCHEDULE
SCALE: NTS

SHEET NOTES:

1. LABELS SHALL BE INSTALLED IN ACCORDANCE WITH THE 2020 NEC.
2. IN ADDITION TO NEC-REQUIRED LABELING, ALL MAJOR ELECTRICAL EQUIPMENT SHALL BE IDENTIFIED PER SPECIFICATIONS IN THIS PLAN SET. LABELS SHALL BE SUITABLE FOR THE ENVIRONMENT IN WHICH THEY ARE INSTALLED.
3. INTERCONNECTION EQUIPMENT AND MATERIALS, INCLUDING SHARED EQUIPMENT WITH THE UTILITY, SHALL BE LABELED PER UTILITY SPECIFICATIONS.
4. ALL LABELS TO COMPLY WITH ANSI STANDARDS FOR PROPER TEXT SIZE, DESIGN, ETC.
5. ADDITIONAL LABELS MAY BE REQUIRED BY THE LOCAL AHJ AND/OR UTILITY. CONTRACTOR TO PROVIDE ALL REQUIRED LABELS.
6. ALL ELECTRICAL EQUIPMENT TO BE SERVICED, INCLUDED BUT NOT LIMITED TO COMBINERS, INVERTERS, TRANSFORMERS, DISCONNECTS, PANELBOARDS, SWITCHBOARDS, AND SWITCHGEAR SHALL BE CLEARLY LABELED WITH WEATHERPROOF LABELS STATING ARC FLASH HAZARD INFORMATION IN ACCORDANCE WITH THE MOST CURRENT VERSION OF NFPA 70E.

DESIGN COORDINATOR

KNOBELSDORFF
25701 370TH STREET
GOODHUE, MN 55027

PROJECT

138883 CEMETERY SUN, LLC
24638 ADAMS RD,
FREDERICK, IL 62639
40.089020°, -90.442132°

ENGINEER

STELLAVISE
SOLAR ENGINEERING
2535 CAMINO DEL RIO S, STE. 235
SAN DIEGO, CA 92108
IL DESIGN FIRM #184.009162
WWW.STELLAVISE.COM (619) 837-5331

SEAL

THIS DRAWING AND ALL INFORMATION HEREIN IS THE PROPERTY OF STELLAVISE INC. ANY REPRODUCTION, MODIFICATION OR USE OF THIS DRAWING FOR OTHER THAN THE INTENDED PROJECT WITHOUT PRIOR WRITTEN AUTHORIZATION FROM STELLAVISE INC. IS STRICTLY FORBIDDEN.

REVISIONS

#	DESCRIPTION	DATE
0	IFC	02/06/2026
1	IFC R1	02/27/2026

ISSUED FOR CONSTRUCTION
FEBRUARY 27, 2026

138883 CEMETERY SUN, LLC
FREDERICK, IL, 62639

SHEET TITLE

EQUIPMENT SIGNAGE

SHEET NO.

E-702